


NEWS FLASH!!!

To all owners of Freightliner and Western Star Class 8 trucks with Detroit Diesel engines!!!

Upgrade your starter to Mitsubishi Electric!

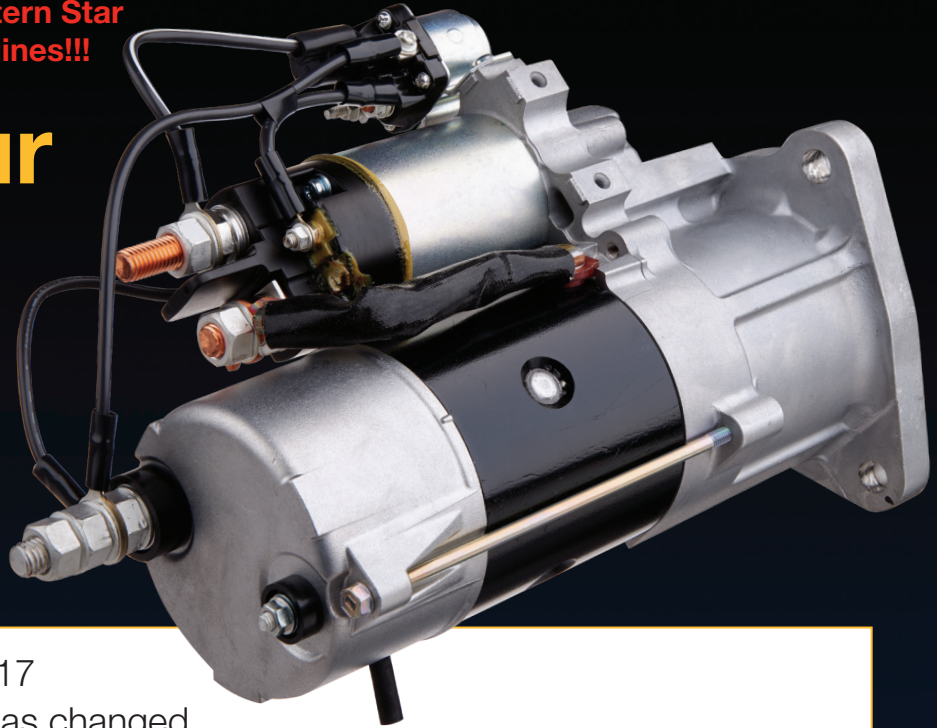

The number of teeth on the GHG17 Detroit Diesel 13/15/16 engines has changed. FL0189 can no longer be used with these new engines. The NEW Diamond Gard Part number for these GHG17 engines is FLA579.

Engine DD13/15/16	Mitsubishi Diamond Gard Part Number	Replaces Delco Remy OE Part Number	Replaces Delco Remy Service Part Number	Ring Gear Teeth	Starter Pinion Teeth
EPA 2010 GHG14	FL0189	8201022 8200671	8200434 8300084	160	12
GHG17	FLA579	8201004	61000704	150	11

The starter housing and box will have a color coded label for easy identification:

For use on 2015 or older DD13/15/16 engines with 160 tooth ring gear ONLY – any other use will damage unit.

FL0189

For use on 2016 or newer DD13/15/16 engines with 150 tooth ring gear ONLY – any other use will damage unit.

FLA579




IF IT FAILS, WE'LL REPLACE IT. GUARANTEED!*

*For more information visit: diamond-gard.com
15603 Centennial Drive • Northville, MI 48168 • phone: 888-MELCO4U


© 2022 Mitsubishi Electric Automotive America, Inc.

Higher Output – DP60 Starter (12V)

Powerful, Tough and Robust Design

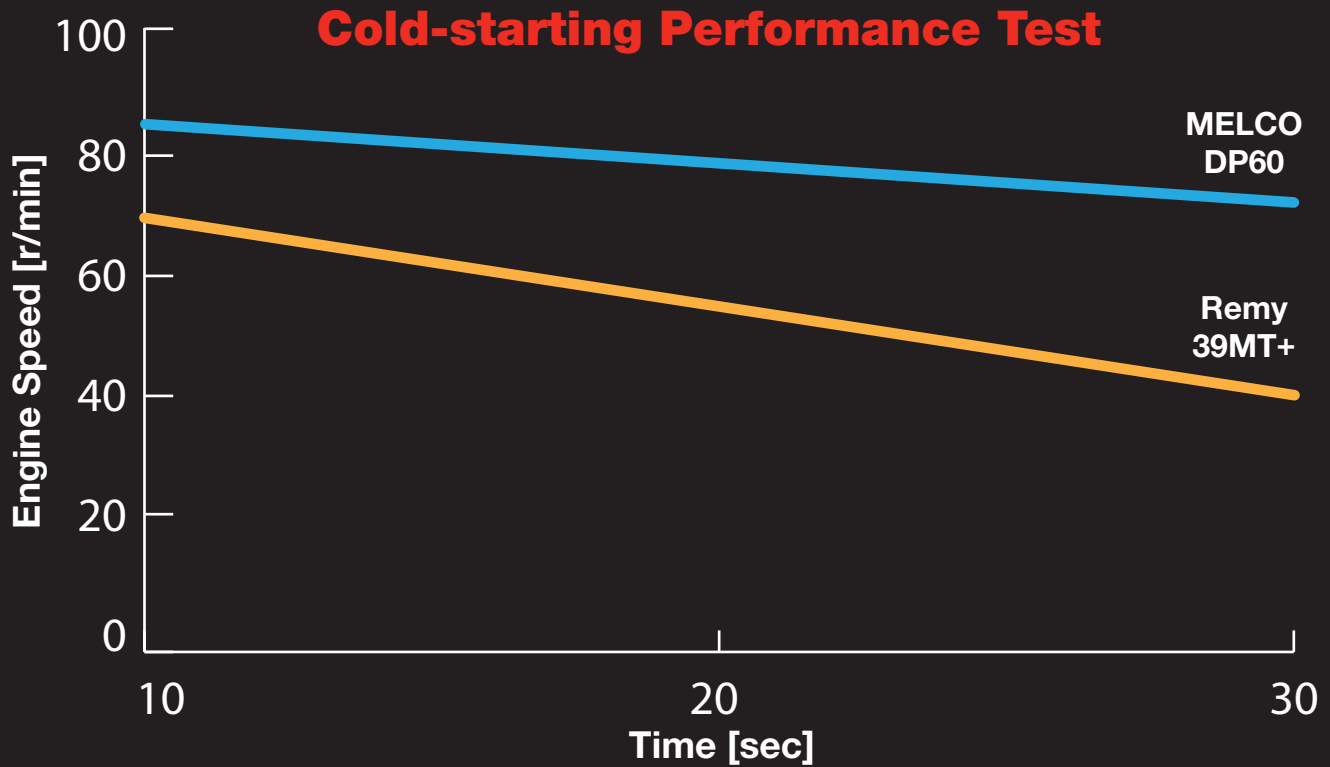

Test Condition: Engine : 15L / I6, Engine Oil : 10W30 Battery : 700CCA x 4, Cable : 0.64mOhm Temperature : -18degC

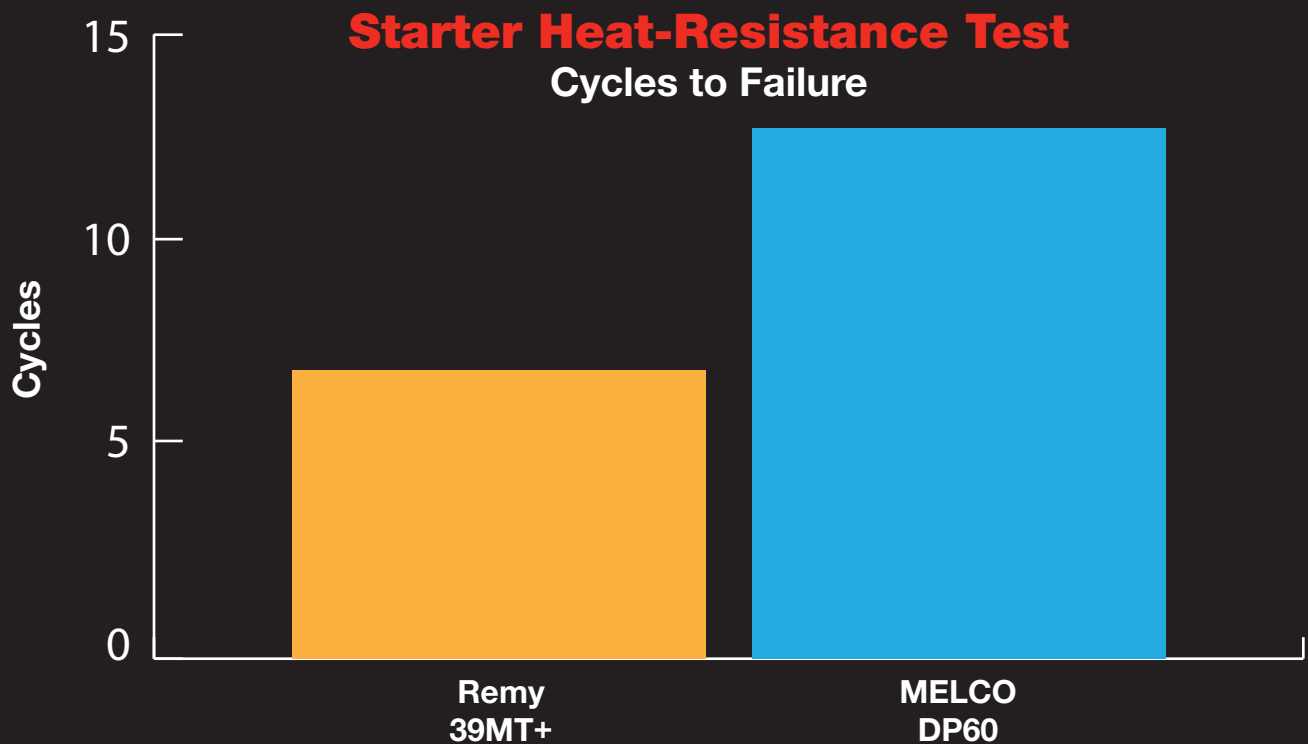

Test Condition: Engine : Starter Load Torque : 75.9 Nm Battery : 700CCA x 4, Cable : 0.64mOhm Pattern : 30sec ON – 120sec OFF